

TURNILS MACHINE DIVISION



The machine in this picture may be fitted with additional equipment.

SUD 730




Vertical blind machine – fully automatic and easy-to-use for cost-effective production

The 730 is an easy-to-use and efficient automatic cut, punch and crease machine for cost-effective production of vertical fabric vanes. Minimizing waste and reducing the labour time and skill level required, the machine still ensures a high quality standard with fabric that is easily inspected using the attached light box.

Cutting, punching and creasing in one cycle, the 730 handles vanes up to four metres long, and different fabric widths with a quick and easy change between widths. With extremely accurate fabric measurement, the linear drive clamping measure ensures you get exactly what you set. There are also several time-saving features – the next blind can be programmed while the machine is running, an end of reel sensor and pause facility optimize the process, and the operator can even cut two rolls of fabric at the same time, doubling the production rate.

The 730 comes as part of a comprehensive range of proven Turnils machinery, production equipment and support services to help you increase the range, capacity and efficiency of your vertical blind production.

SUD 730

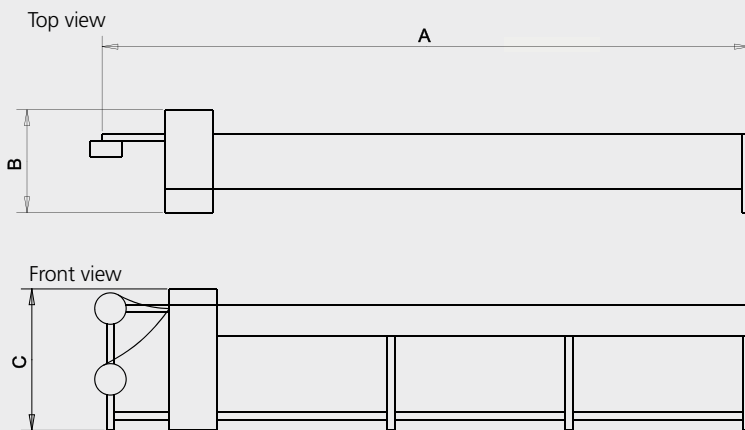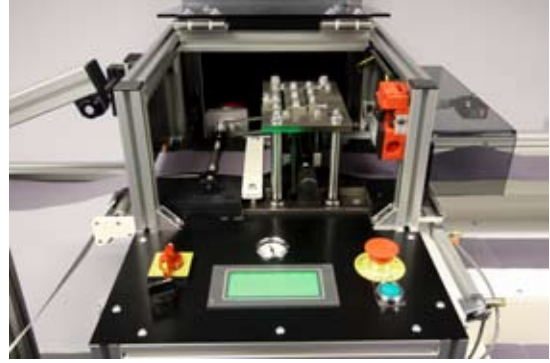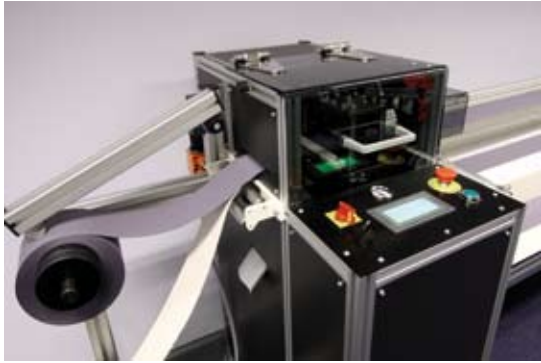

Cutting length (mm)	Machine dimension (mm)
3000	4400
4000	5400

730 features

- Cutting, punching and creasing in one cycle
- Easy to operate and maintain
- Extremely accurate and efficient
- Two rolls can be cut at same time
- Next blind can be entered while machine is running
- Standard production for vanes up to 3 m long
- Quick and easy change between vane widths
- Vanes are automatically stacked
- Lightbox allows easy and accurate fabric inspection
- Adjustable bottom pocket size
- End of reel sensor
- Pause facility
- Fabric consumption counter
- Programme for sloped windows
- Support services i.e. technical support, spare parts, installation and training

Option

- Can be fitted for production of 4 m vanes

Technical data

Current: single phase 230V (50/60 Hz)
Air supply: approx. 6 bar or 30 l/min